



Color Plotter


JLZ-1000

## How to Switch a Display Language

The display language of the menus of this equipment is set to Japanese at the factory delivery. Use the following procedure to switch the display language to English.

### [Keys used]

In this procedure, use the keys of the operation unit that are enclosed by a square.

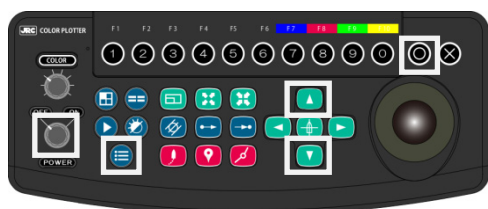

- 1 Turn on the power supply of this equipment by turning the [POWER] switch to the right side.

Wait for a while, and when the message, “何かキーを押してください”(Press any key.)” is displayed in blinking mode at lower right of a screen, press any key.

A map screen is displayed.

- 2 Hold down the [Menu] key.

The following menu is displayed.

システム設定	
システム設定	▶
自船	▶
地図	▶
測深	▶
GPS	▶
航跡	▶
通信	▶
AIS	▶
ARPA(TT)	▶
DSB(TT)	▶
GPSブイ	▶
アラーム	▶
メモリー	▶
その他設定	▶

- 3 By using the [Up/Down] keys, display [システム設定] in reverse video.

システム設定	
システム設定	▶
自船	▶
地図	▶

- 4 Press the [Enter] key.

システム設定	
言語/Languages	日本語
地図	Newpec
キー音	オン
キー照明	自動
矢印キー	通常
表示タイマー	オフ
トラックボール	速
データバー種類	種類 - 1
単位	▶
初期化	▶
システム情報	

- 5 By using the [Up/Down] keys, display [言語/Languages] in reverse video.

システム設定	
言語/Languages	日本語
地図	Newpec
キー音	オン

- 6 Press the [Enter] key.

日本語	
English	

- 7 By using the [Up/Down] keys, display [English] in reverse video.

日本語	
English	

- 8 Press the [Enter] key.

The display language of the menus is changed to English.